




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/22</b>		A1	(11) International Publication Number: <b>WO 99/51048</b>
			(43) International Publication Date: 7 October 1999 (07.10.99)
(21) International Application Number: PCT/US99/07075 (22) International Filing Date: 31 March 1999 (31.03.99) (30) Priority Data: 09/053,568                      1 April 1998 (01.04.98)                      US (71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US). (72) Inventors: ALPEROVICH, Vladimir; 18419 Rain Dance Trail, Dallas, TX 75252 (US). BOLTZ, David; 601 N. Glenville #155, Richardson, TX 75083 (US). (74) Agents: MOORE, Stanley, R. et al.; Jenkins & Gilchrist, P.C., Suite 3200, 1445 Ross Avenue, Dallas, TX 75202 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.          Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: SYSTEM AND METHOD FOR ENHANCED SHORT MESSAGE SERVICE

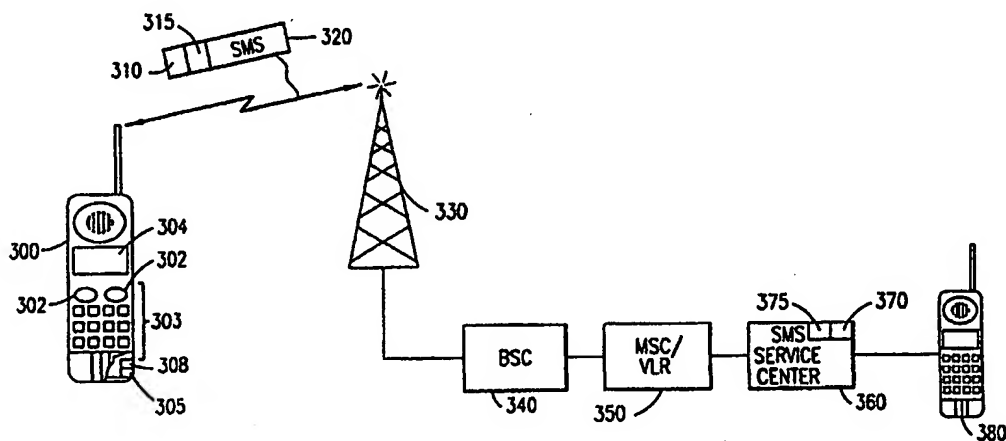

## (57) Abstract

A telecommunications system and method is disclosed for organizing SMS messages sent to a mobile terminal based on the location of the mobile terminal or the time of delivery of the SMS messages. Thus, when a subscriber sends a short message to another subscriber, the originating subscriber can specify the time of delivery of the message. In addition, the originating subscriber can specify the priority associated with the message, e.g., the SMS message can have an indication of priority one, which indicates to the receiving subscriber that the message is urgent. Furthermore, the originating subscriber can also specify that the message is to be delivered only when the called subscriber is in a certain location. The receiving subscriber can also control the display of the SMS messages by moving the received SMS messages to an action list, and then specifying when and/or where the SMS messages should be displayed again.

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## SYSTEM AND METHOD FOR ENHANCED SHORT MESSAGE SERVICE

### BACKGROUND OF THE PRESENT INVENTION

#### Field of the Invention

5           The present invention relates generally to telecommunications systems and methods for delivering Short Message Service (SMS) messages, and specifically to organizing SMS messages based on the location of the receiving mobile terminal or on the time of delivery of the SMS message.

#### Background and Objects of the Present Invention

10           Cellular telecommunications is one of the fastest growing and most demanding telecommunications applications ever. Today it represents a large and continuously increasing percentage of all new telephone subscriptions around the world. A standardization group, European Telecommunications Standards Institute (ETSI), was  
15           established in 1982 to formulate the specifications for the Global System for Mobile Communication (GSM) digital mobile cellular radio system in use today, and described in more detail herein.

            With reference now to FIGURE 1 of the drawings, there is illustrated a GSM Public Land Mobile Network (PLMN), such as cellular network 10, which in turn is  
20           composed of a plurality of areas 12, each with a Mobile Services Center (MSC) 14 and an integrated Visitor Location Register (VLR) 16 therein. The MSC/VLR areas 12, in turn, include a plurality of Location Areas (LA) 18, which are defined as that part of a given MSC/VLR area 12 in which a mobile station (MS) 20 may move freely without having to send update location information to the MSC/VLR area 12 that  
25           controls the LA 18. Each Location Area 12 is divided into a number of cells 22.

            Mobile Station (MS) 20 is the physical equipment, e.g., a car phone or other portable phone, used by mobile subscribers to communicate with the cellular network 10, each other, and users outside the subscribed network, both wireline and wireless. The MS 20 may also include a Subscriber Identity Module (SIM) card 13, or other  
30           memory, which provides storage of subscriber related information, such as a

-2-

subscriber authentication key, temporary network data, and service related data (e.g. language preference).

5 The MSC 14 is in communication with at least one Base Station Controller (BSC) 23, which, in turn, is in contact with at least one Base Transceiver Station (BTS) 24. The BTS is the physical equipment, illustrated for simplicity as a radio tower, that provides radio coverage to the geographical part of the cell 22 for which it is responsible. It should be understood that the BSC 23 may be connected to several base transceiver stations 24, and may be implemented as a stand-alone node or integrated with the MSC 14. In either event, the BSC 23 and BTS 24 components, as  
10 a whole, are generally referred to as a Base Station System (BSS) 25.

With further reference to FIGURE 1, the PLMN Service Area or cellular network 10 includes a Home Location Register (HLR) 26, which is a database maintaining all subscriber information, e.g., user profiles, current location information, International Mobile Subscriber Identity (IMSI) numbers, and other administrative  
15 information. The HLR 26 may be co-located with a given MSC 14, integrated with the MSC 14, or alternatively can service multiple MSCs 14, the latter of which is illustrated in FIGURE 1.

The VLR 16 is a database containing information about all of the Mobile Stations 20 currently located within the MSC/VLR area 12. If a MS 20 roams into a  
20 new MSC/VLR area 12, the VLR 16 connected to that MSC 14 will request data about that Mobile Station 20 from the HLR database 26 (simultaneously informing the HLR 26 about the current location of the MS 20). Accordingly, if the user of the MS 20 then wants to make a call, the local VLR 16 will have the requisite identification information without having to reinterrogate the HLR 26. In the  
25 aforementioned manner, the VLR and HLR databases 16 and 26, respectively, contain various subscriber information associated with a given MS 20.

With reference now to FIGURE 2 of the drawings, text messages, containing up to 160 alpha numerical characters, can be sent to and from MSs 200, using the Short Message Service (SMS) 210. SMS 210 utilizes a Service Center 220, which  
30 stores and forwards short messages to MSs 200. A SMS 210 message can be sent

-3-

from the Service Center 220 to the MS 200 or from the MS 200 to the Service Center 220.

5       The mobile terminated SMS 210 transfers a short message from the Service Center 220 to the MS 200. In addition, information about the delivery of the short message is returned to the Service Center 220. This information is either a delivery report, which confirms the delivery of the message to a recipient, or a failure report, which informs the originator that the short message was not delivered and the reason why. If the information is a failure report, the originator has the ability to order retransmission later.

10       A mobile terminated SMS message typically originates by a user 240 sending a message to the Service Center 220, which then forwards the message to the SMS Gateway Mobile Switching Center (SMS-GMSC) 250. Thereafter, the SMS-GMSC 250 interrogates the HLR 260 for routing information pertaining to the designated MS 200. The HLR 260 returns this routing information to the SMS-GMSC 250, which  
15       can then route the message to the MSC/VLR 270 serving the location area (LA) 205 that the MS 200 is in. If the MS 200 is in IDLE mode (not in use), the MS 200 is paged, and a connection is set up between the MS 200 and the network 270, as in the normal call setup case. The MSC/VLR 270 then delivers the SMS message 210 to the MS 200. SMS messages 210 are preferably transmitted on the allocated signaling  
20       channel. However, if the MS 200 is in busy mode (in use), the SMS message 210 will be transmitted on the Slow Associated Control Channel (SACCH). In that case, no paging, call setup, or authentication need to be performed.

      After the MSC/VLR 270 send the SMS message 210 to the MS, a delivery report is sent from the serving MSC/VLR 270 to the Service Center 220. If delivery  
25       of the SMS message 210 was not successful, the HLR 260 is informed, and a failure report is sent to the Service Center 220. In addition, if the delivery was unsuccessful, a Messages Waiting service 215 within the Service Center 220 can optionally provide the HLR 260 and the serving MSC/VLR 270 with the information that there is a message in the originating Service Center 220 waiting to be delivered to the MS 200.  
30       Once the MS 200 becomes available for receipt of the SMS message 210, the HLR 260 informs the Service Center 220 and the SMS message 210 is sent again. The

-4-

mobile terminated SMS message 210 can be input to the Service Center 220 by a variety of sources, e.g., speech, telex or facsimile.

5 A mobile originated SMS message can also be submitted by the MS 200 to the Service Center 220. The MS 200 first establishes a connection to the network (serving MSC/VLR 270), as in the case of a normal call setup. However, it should be noted that if the MS is in busy mode, a connection already exists. Once a connection is made with the serving MSC/VLR 270 and the authentication of MS 200 is confirmed, the MS 200 can send the SMS message to the Service Center 220 via the serving MSC/VLR 270. The Service Center 220 in turn forwards the SMS message 210 to its  
10 destination, which could be another MS (not shown) or a user 240 in the fixed network, the latter of which is illustrated in FIGURE 2. Once the SMS message 210 is delivered to the end user 240, either a delivery report or a failure report is sent to the Service center 220.

15 The SMS messages 210 are becoming popular because, at present, the cost of sending a SMS message 210 is lower than the cost of a phone call. For example, a SMS message 210 sent to a MS 200 can be a reminder or a "to do" message, such as "buy milk on the way home", or "call your mother". However, there is currently no existing way to organize such messages based on the location of the MS 200 or the time of delivery of the SMS messages 210.

20 It is, therefore, an object of the present invention to organize SMS messages sent to a mobile terminal based on the location of the mobile terminal or the time of delivery of the SMS messages.

#### SUMMARY OF THE INVENTION

25 The present invention is directed to telecommunications systems and methods for organizing SMS messages sent to a mobile terminal based on the location of the mobile terminal or the time of delivery of the SMS messages. Thus, when a subscriber sends a short message to another subscriber, the originating subscriber can specify the time of delivery of the message, including the time(s) to repeat delivery of the  
30 message. In addition, the originating subscriber can specify the priority associated with the message, e.g., the SMS message can have an indication of priority one, which

-5-

indicates to the receiving subscriber that the message is urgent. Furthermore, the originating subscriber can also specify that the message is to be delivered only when the called subscriber is in a certain location. The receiving subscriber can also control the display of the SMS messages by moving the received SMS messages to an action list, and then specifying when and/or where the SMS messages should be displayed again.

### BRIEF DESCRIPTION OF THE DRAWINGS

The disclosed inventions will be described with reference to the accompanying drawings, which show important sample embodiments of the invention and which are incorporated in the specification hereof by reference, wherein:

FIGURE 1 is a block diagram of a conventional terrestrially-based wireless telecommunications system;

FIGURE 2 illustrates the delivery of Short Message Service (SMS) messages to and from a mobile terminal;

FIGURE 3 shows the organization of SMS messages based upon the priority associated with the SMS message; and

FIGURE 4 shows the organization of SMS messages based upon the location of the mobile terminal.

### DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EXEMPLARY EMBODIMENTS

The numerous innovative teachings of the present application will be described with particular reference to the presently preferred exemplary embodiments. However, it should be understood that this class of embodiments provides only a few examples of the many advantageous uses of the innovative teachings herein. In general, statements made in the specification of the present application do not necessarily delimit any of the various claimed inventions. Moreover, some statements may apply to some inventive features but not to others.

With reference now to FIGURE 3 of the drawings, an originating subscriber 380 can send a Short Message Service (SMS) message 320 with a priority indication 310 to a receiving Mobile Station (MS) 300, which informs the subscriber associated

-6-

with the receiving MS 300 of the urgency of the received SMS message 320. A Subscriber Identity Module (SIM) card 305, or other memory, within the MS 300 can have a new SMS-organizational (SMS-org) application 308, which receives the SMS messages 320 and associated priorities 310, sorts the SMS messages 320 by priority 310 and displays the SMS messages 320 according to the priorities 310 indicated. The SMS-org application 308 can also store the SMS messages 320 according to priority 310 within the SIM card 305, or other memory, for later retrieval by the MS 300. For example, a taxi company could send a SMS message 320 to one of its taxi drivers instructing the taxi driver to pick up a group of people at a certain time. Depending upon the time of delivery of the SMS message 320, the taxi company can assign priority one 310, if the taxi driver must pick them up immediately, priority two 310 if the taxi driver has other fares to handle before the pick up time, or priority three 310 if the taxi driver is to pick them up at his convenience or on the next day.

The SMS messages 320 are forwarded from the originating subscriber 380 to the MS 300 via a SMS Service Center 360, a serving Mobile Switching Center/Visitor Location Register (MSC/VLR) 350, a Base Station Controller (BSC) 340 and a Base Transceiver Station (BTS) 330. The MS 300 receives the SMS message 320, along with any other SMS messages (not shown), and stores the messages 320 within the SIM card 305, or other memory, according to the associated priorities 310. When the subscriber reads the SMS messages 320, e.g., by pressing a function key 302 on a keypad 303 of the MS 300, the messages 320 will be displayed on a display 304 according to priority 310. Thus, the subscriber can request that only priority one 310 messages 320 be displayed, or can request all messages 320 to be displayed with priority one 310 messages 320 listed first. In addition, for urgent messages 320, such as priority one 310 messages 320, the MS 300 can beep at regular intervals to inform the subscriber that an urgent SMS message 320 is waiting. Once the subscriber reads the SMS message 320, the MS 300 can stop beeping and the subscriber can either erase the SMS message 320 from memory 305 or store the SMS message 320 within the memory 305 for later retrieval by the subscriber.

Furthermore, the originating subscriber 380, e.g., the taxi company, can send the SMS message 320 with a reminder indicator 315, which instructs the SMS-org



-7-

application 308 to display the SMS message 320 at predefined intervals of time, e.g., every hour for six hours, or instructs the SMS-org application 308 to display the SMS message 320 immediately and then display a reminder message 320 at a certain time(s). In addition, the originating subscriber 380 can change the priority 310 of the SMS message 320 based upon the time of delivery. For example, an SMS message 320 can have a priority two indicator 310 associated with it the first time the message 320 is sent, and a priority one indicator 310 associated with it when it is sent a second time (reminder message 320).

Alternatively, the SMS Service Center 360 can have a SMS-org application 370 located therein, which can receive the SMS messages 320 and associated reminder indicators 315 from the originating subscriber 380 and store them in a memory 375 within the SMS Service Center 360 until the time associated with the reminder indicator is reached. Thereafter, the SMS Service Center 360 can send the SMS message 320 to the MS 300 for display on the MS display 304.

If an SMS message 320 is sent from a subscriber 380 that does not have the ability to establish a priority indicator 310, the SMS message 320 will be delivered to the receiving MS 300 without the priority indicator 310. The SMS-org application 308 can then receive the SMS message 320 and display it without a priority indicator 310 at the end of the priority messages 320.

In addition, for SMS messages 320 with priority indicators 310, the SMS-org application 308 can determine the originating subscriber's 380 identity, and if the originating subscriber 380 is not authorized to establish a priority indicator 310, the SMS-org application 308 can discard the priority 310 and display the message 320 at the end of the priority messages 320. Alternatively, the inclusion of a priority indicator 310 with the SMS message 320 can be password protected by the originating subscriber 380, thus preventing any unauthorized priority indicators 310 with delivered SMS messages 320.

With reference now to FIGURE 4 of the drawings, an originating subscriber 480 can send an SMS message 420 having associated location information 470, instead of or in addition to a priority indicator 410, to a MS 400. The location information 470 can include a location area, a set of coordinates, e.g., latitude and

-8-

longitude, or a specific geographical reference point, which indicates where the MS 400 should be when the SMS message 420 is displayed on the display 404 of the MS 400.

5 In one embodiment, the SMS-org application 408 can store the SMS message 420 in the SIM card 405, or other memory, along with location information 470 and handling instructions until the location of the MS 400 corresponds with the location information 470 associated with the SMS message 420. When the MS 400 changes location, such as when the MS 400 moves to a different Location Area (LA) 490, all location dependent messages 420 in the SIM card 405 are checked. For example, if  
10 the location information 470 is a location area 490, once the MS 400 registers with the MSC/VLR 450 for the location area 490 corresponding to the location information 470, the SMS-org application 408 will display the SMS message 420 on the MS display 404 to the subscriber.

15 Alternatively, the SMS Service Center 460 can have a SMS-org application (node) 475, which stores the SMS message 420 within a memory 478 and periodically checks the location of the MS 400. Once the MS 400 is within the location area 490 corresponding with the location information 470, the SMS Service Center 460 can send the SMS message 420 to the serving MSC/VLR 450, which can then forward the SMS message 420 to the MS 400 via the serving BSC 440 and BTS 430.

20 However, if the location information 470 is a set of coordinates, or a specific geographical reference point, e.g., the corner of 5th Street and 16th Street, the SMS-org application 408 or the SMS Service Center 460 will have to periodically position the MS 400, as is well understood in the art, depending upon the detail of the location information 470. Once the position of the MS 400 corresponds to the location  
25 information 470 within a predetermined allowable distance, e.g., within one mile, the SMS message 420 is either displayed on the MS display 404 by the SMS-org application 408, or sent to the MS 400 by the SMS Service Center 460.

In addition, the originating subscriber 480 can send the SMS message 420 with instructions to deliver it immediately to the MS 400 regardless of the location of the  
30 MS 400, and with a reminder indicator 415 and location indicator 470, which instructs the SMS Service Center 460 to deliver a reminder SMS message 420 at a later time

-9-

when the MS 400 is at a specific location. For example, the originating subscriber 480 could send an SMS message 420 saying "Don't forget to stop at the store on the way home," which is delivered immediately and a reminder message 420, which is delivered when the MS 400 enter the location area 490 for the store. Alternatively, both SMS messages 420 (immediate and reminder) can be sent to the MS 400 immediately, and the SMS-org application 408 can display the first message 420 immediately and store the reminder message based upon the reminder indicator 415 and the location indicator 470 until the MS 400 has entered the location area 490 for the store.

Once the subscriber views the SMS message 420, the subscriber has the option of erasing the SMS message 420 from memory 405, storing the SMS message 420 in memory 405 for later retrieval, or moving the SMS message 420 to an action list 406 within the SIM card 405, or other memory. The SIM card 405 can then store the SMS message 420 until a time or location defined by the receiving subscriber occurs. Thus, the receiving subscriber can view the SMS message 420 and place it in the action list 406, instructing the SMS-org application 408 to display a reminder message when a certain time occurs or when the MS 400 has entered a specific location area 490.

As will be recognized by those skilled in the art, the innovative concepts described in the present application can be modified and varied over a wide range of applications. Accordingly, the scope of patented subject matter should not be limited to any of the specific exemplary teachings discussed.

For example, it should be understood that the SMS organization system and method described herein can be applied to any wireless telecommunications system which utilizes short messages, including, but not limited to, Global System for Mobile Communications (GSM) networks, Personal Communications System (PCS) networks, AMPS networks and D-AMPS networks.

-10-

**WHAT IS CLAIMED IS:**

1. A telecommunications system for organizing short messages received by a given one of a plurality of mobile terminals in wireless communication with a mobile switching center, said telecommunications system comprising:

5 an organizational node in communication with said given mobile terminal and said mobile switching center for receiving said short messages and respective indicators associated with respective ones of said short messages from an originating subscriber in communication with said mobile switching center, said organizational node organizing said short messages based upon said respective indicators; and

10 a memory connected to said organizational node for storing said short messages and said respective indicators, said short messages being displayed on a display on said given mobile terminal according to said respective indicators.

2. The telecommunications system of Claim 1, wherein said  
15 organizational node is within said memory, said memory being within said given mobile terminal, said short messages and said respective indicators being sent from said originating subscriber to said organizational node within said given mobile terminal via said mobile switching center.

20 3. The telecommunications system of Claim 1, wherein said memory is a Subscriber Identity Module within said given mobile terminal.

4. The telecommunications system of Claim 1, wherein said  
25 organizational node and said memory are within a service node connected to said mobile switching center, said short messages and said respective indicators being sent from said originating subscriber to said organizational node within said service node, said short messages and said associated indicators being retrieved from said memory, by said organizational node, and sent to said given mobile terminal to be displayed on said display of said given mobile terminal via said mobile switching center.

30

-11-

5. The telecommunications system of Claim 4, wherein said service node is an SMS Service Center.

6. The telecommunications system of Claim 1, wherein said respective indicators associated with said respective short messages are priority indicators.

7. The telecommunications system of Claim 6, wherein said organizational node stores said short messages within said memory according to said respective priority indicators, said short messages being displayed on said given mobile terminal according to said respective priority indicators.

8. The telecommunications system of Claim 6, wherein said priority indicators are password protected by said originating subscriber.

9. The telecommunications system of Claim 1, wherein said respective indicators associated with said respective short messages are reminder indicators.

10. The telecommunications system of Claim 9, wherein said short messages associated with said respective reminder indicators are stored by said organizational node within said memory until a time associated with a given one of said reminder indicators is reached, said short message associated said given reminder indicator being displayed on said display of said given mobile terminal when said time is reached.

11. The telecommunications system of Claim 1, wherein said respective indicators associated with said respective short messages are location indicators.

12. The telecommunications system of Claim 11, wherein said location indicators are selected from the group consisting of: latitude and longitude, a location area, and a geographical reference point.

-12-

13. The telecommunications system of Claim 11, wherein a given one of said location indicators is associated with a location, said short message associated with said given location indicator being displayed on said display of said given mobile terminal when said given mobile terminal enters said location.

14. The telecommunications system of Claim 1, wherein said given mobile terminal has an action database therein, said short messages displayed on said display of said given mobile terminal being moved to said action database.

15. The telecommunications system of Claim 15, wherein each of said short messages within said action database has an additional respective indicator associated therewith.

16. The telecommunications system of Claim 14, wherein said action database is within said memory.

17. The telecommunications system of Claim 1, wherein a given one of said short messages does not have one of said respective indicators associated therewith, said given short message being displayed on said display of said given mobile terminal without said indicator after additional ones of said short messages having respective indicators associated therewith are displayed.

18. A method for organizing short messages received by a given one of a plurality of mobile terminals in wireless communication with a mobile switching center within a cellular network, said method comprising the steps of:

receiving, by an organizational node in communication with said given mobile terminal and said mobile switching center, said short messages and respective indicators associated with respective ones of said short messages from an originating subscriber in communication with said mobile switching center;

storing, by said organizational node, said short messages and said respective

-13-

indicators within a memory connected to said organizational node; and

displaying, by said organizational node, on a display on said given mobile terminal, said short messages according to said respective indicators.

5           19.    The method of Claim 18, wherein said organizational node is within said memory, said memory being within said given mobile terminal, said step of receiving being performed by said short messages and said respective indicators being sent from said originating subscriber to said organizational node within said given mobile terminal via said mobile switching center.

10

          20.    The method of Claim 18, wherein said memory is a Subscriber Identity Module within said given mobile terminal.

15

          21.    The method of Claim 18, wherein said organizational node and said memory are within a service node connected to said mobile switching center, said step of receiving being performed by said short messages and said respective indicators being sent from said originating subscriber to said organizational node within said service node, said step of displaying being performed by said organization node retrieving said short messages and said associated indicators from said memory and sending said short messages and said associated indicators to said given mobile terminal to be displayed on said display of said given mobile terminal via said mobile switching center.

20

          22.    The method of Claim 21, wherein said service node is an SMS Service Center.

25

          23.    The method of Claim 18, wherein said respective indicators associated with said respective short messages are priority indicators.

30           24.    The method of Claim 23, wherein said step of storing is performed by said organizational node storing said short messages and said respective priority

-14-

indicators within said memory according to said respective priority indicators, said step of displaying being performed by said organizational node retrieving said short messages and said respective priority indicators from memory and sending said short messages and said respective priority indicators to said given mobile terminal to be  
5 displayed on said display of said given mobile terminal according to said priority indicators.

25. The method of Claim 23, wherein said priority indicators are password protected by said originating subscriber.  
10

26. The method of Claim 18, wherein said respective indicators associated with said respective short messages are reminder indicators.

27. The method of Claim 26, wherein said step of storing is performed by  
15 said organizational node storing said short messages associated with said respective reminder indicators within said memory until a time associated with a given one of said reminder indicators is reached, said step of displaying being performed by said organizational node retrieving from said memory said short message associated said given reminder indicator and displaying said short message associated with said given  
20 reminder indicator on said display of said given mobile terminal when said time is reached.

28. The method of Claim 18, wherein said respective indicators associated with said respective short messages are location indicators.  
25

29. The method of Claim 28, wherein said location indicators are selected from the group consisting of: latitude and longitude, a location area, and a geographical reference point.

30. The method of Claim 28, wherein a given one of said location indicators is associated with a location, said step of displaying being performed by said  
30



-15-

short message associated with said given location indicator being displayed on said given mobile terminal when said given mobile terminal enters said location.

5           31.    The method of Claim 30, further comprising, before said step of displaying, the step of:

          monitoring, by said organizational node, the location of said given mobile terminal.

10           32.    The method of Claim 18, wherein said given mobile terminal has an action database therein, and further comprising, after said step of displaying, the step of:

          moving, by said organizational node, said short messages displayed on said display of said given mobile terminal to said action list.

15           33.    The method of Claim 32, wherein each of said short messages within said action database has an additional respective indicator associated therewith.

          34.    The method of Claim 32, wherein said action database is within said memory.

20

          35.    The method of Claim 18, wherein a given one of said short messages does not have one of said respective indicators associated therewith, said step of displaying being performed by said given short message being displayed on said display of said given mobile terminal without said indicator after additional ones of  
25   said short messages having respective indicators associated therewith are displayed.

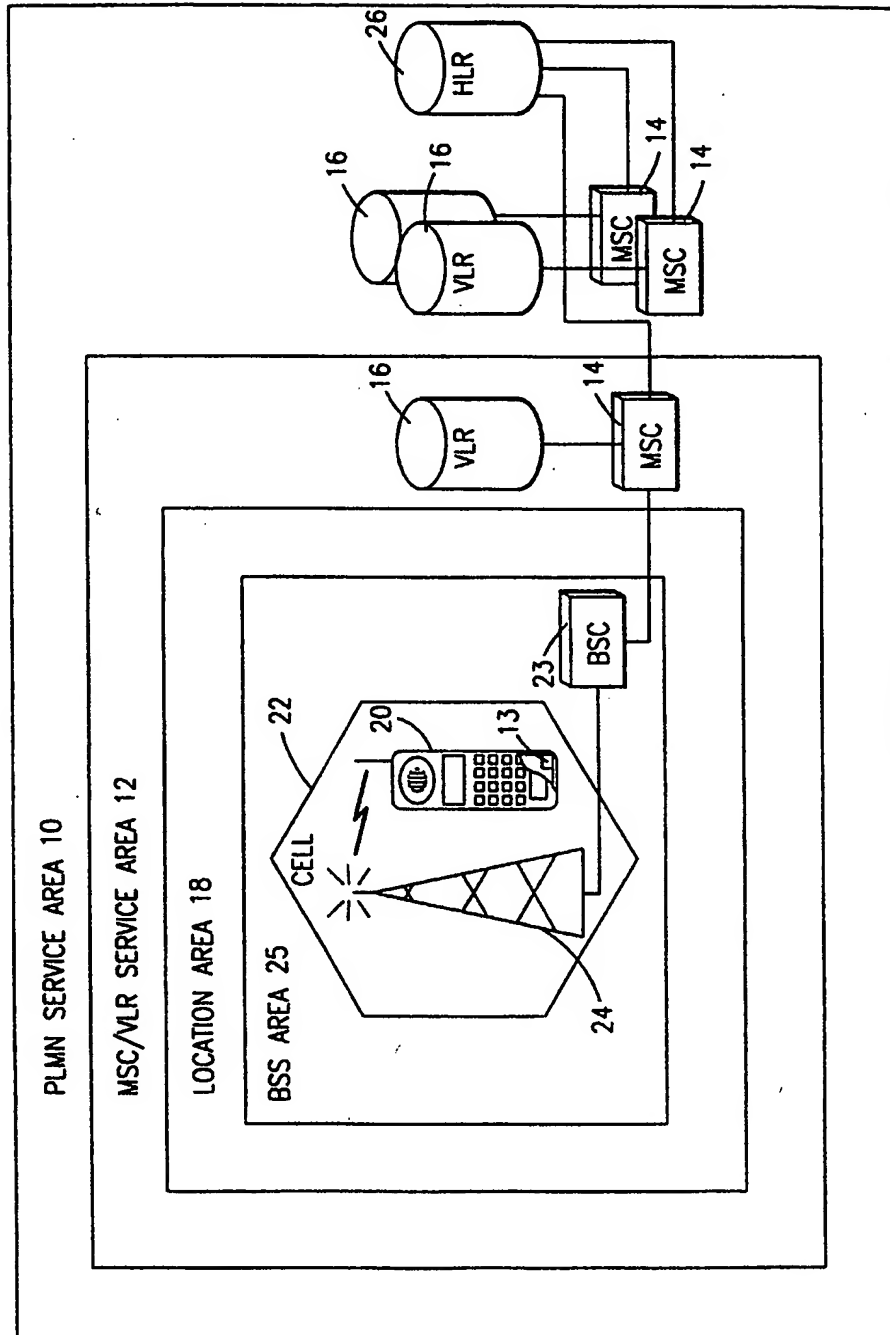


FIG. 1

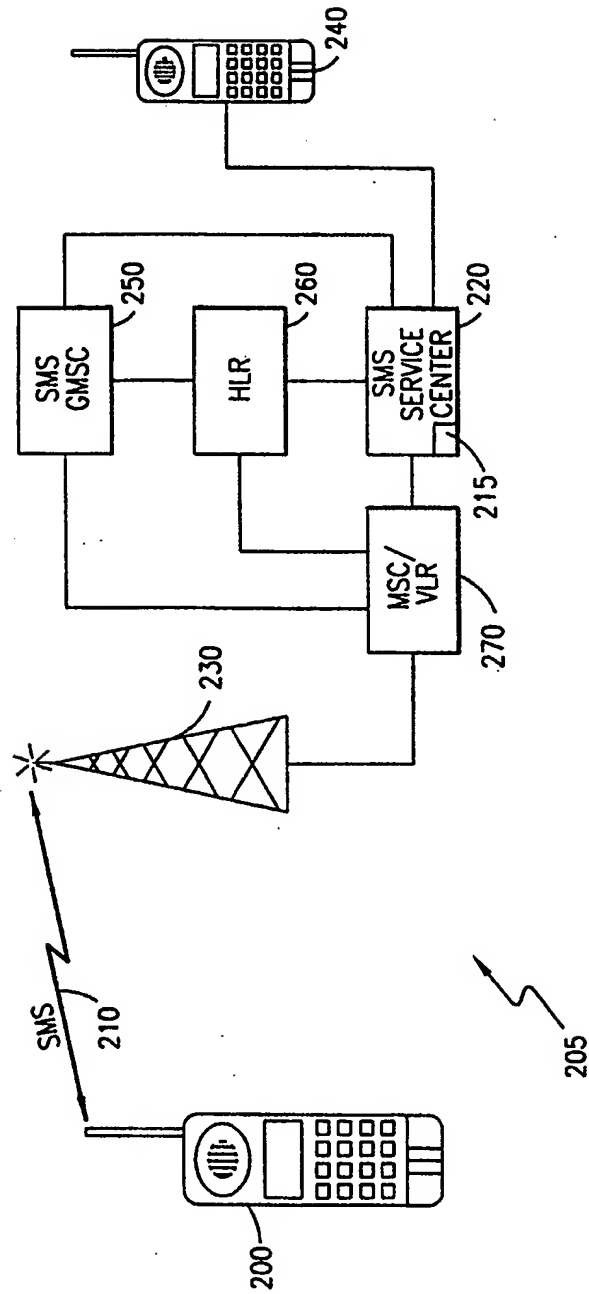


FIG. 2


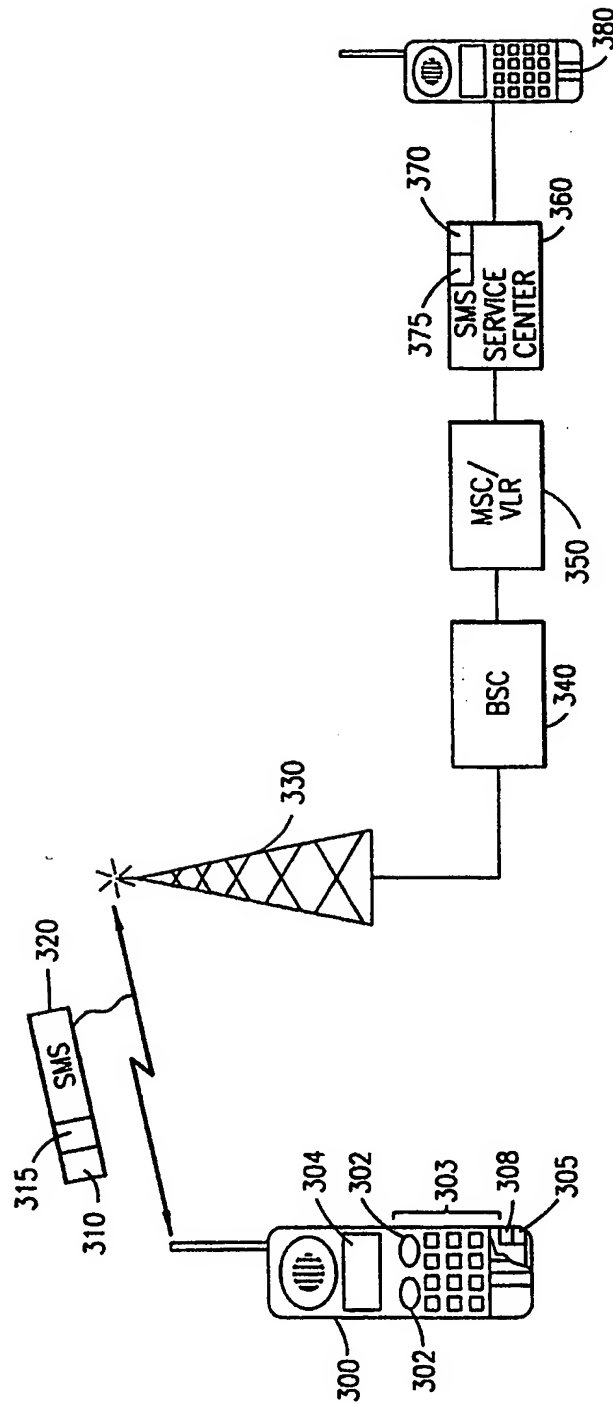


FIG. 3

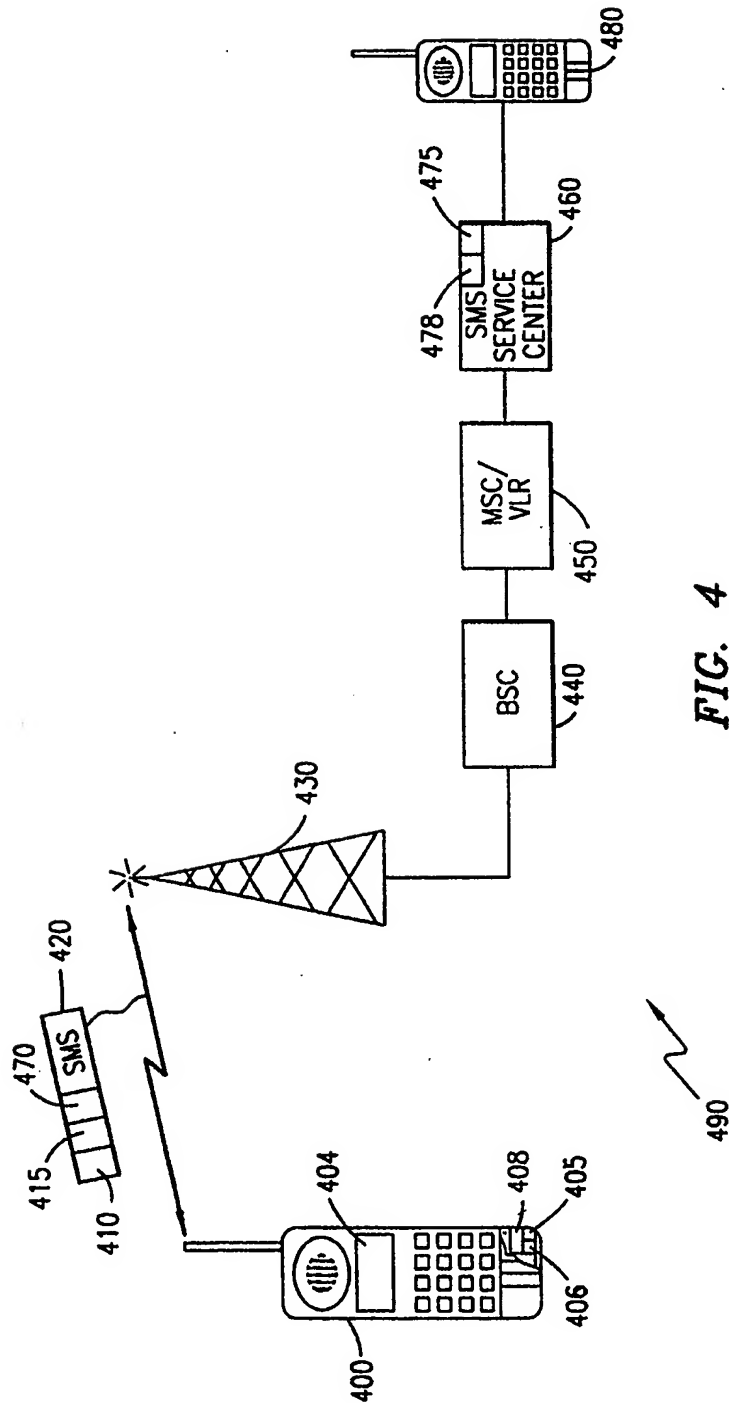

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/07075

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q7/22

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 95 12933 A (ERICSSON TELEFON AB L M ;FEHNEL MICHAEL D (US)) 11 May 1995 (1995-05-11)  page 4, line 16 - page 6, line 7 page 8, line 9-20 page 8, line 21 - page 9, line 6 page 16, line 1-29 ---	1,2,4-7, 9,10, 17-19, 21-24, 26,27,35
A		8
X	EP 0 689 368 A (PTT GENERALDIREKTION) 27 December 1995 (1995-12-27)  column 3, line 29 - column 5, line 31 column 8, line 33 - column 10, line 1 claim 1 --- -/--	1-5, 14-22, 32-35

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

20 July 1999

Date of mailing of the international search report

27/07/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Weinmiller, J

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 99/07075

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 97 41654 A (MCLORINAN ANDREW GEORGE ;TSOUKAS GEORGE JAMES (AU); ERICSSON TELEF) 6 November 1997 (1997-11-06)</p> <p>page 8, line 15-31 -----</p>	<p>1, 2, 4, 5, 9-13, 17-19, 21, 22, 26-31, 35</p>

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/07075

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9512933 A	11-05-1995	US 5603081 A	11-02-1997
		AU 681730 B	04-09-1997
		AU 1048095 A	23-05-1995
		AU 680071 B	17-07-1997
		AU 1048395 A	23-05-1995
		AU 691850 B	28-05-1998
		AU 1087495 A	23-05-1995
		AU 685885 B	29-01-1998
		AU 1087695 A	23-05-1995
		AU 695892 B	27-08-1998
		AU 2079997 A	24-07-1997
		AU 2358897 A	14-08-1997
		AU 690924 B	07-05-1998
		AU 7757094 A	18-05-1995
		AU 7865898 A	15-10-1998
		AU 7865998 A	01-10-1998
		AU 697210 B	01-10-1998
		AU 8131394 A	23-05-1995
		AU 681721 B	04-09-1997
		AU 8131494 A	23-05-1995
		BR 9404316 A	04-07-1995
		BR 9405702 A	28-11-1995
		BR 9405703 A	28-11-1995
		BR 9405704 A	28-11-1995
		BR 9405705 A	28-11-1995
		BR 9405743 A	05-12-1995
		BR 9405927 A	05-12-1995
		CA 2134695 A	02-05-1995
		CA 2152942 A	11-05-1995
		CA 2152943 A	11-05-1995
		CA 2152944 A	11-05-1995
		CA 2152945 A	11-05-1995
		CA 2152946 A	11-05-1995
		CA 2152947 A	11-05-1995
		CN 1112345 A	22-11-1995
		CN 1117329 A	21-02-1996
		CN 1116888 A	14-02-1996
		CN 1117330 A	21-02-1996
		CN 1117331 A	21-02-1996
		CN 1124074 A	05-06-1996
		CN 1117332 A	21-02-1996
		EP 0652680 A	10-05-1995
		EP 0682829 A	22-11-1995
		EP 0679304 A	02-11-1995
		EP 0677222 A	18-10-1995
		EP 0681766 A	15-11-1995
		EP 0677223 A	18-10-1995
		EP 0677224 A	18-10-1995
		FI 953262 A	30-08-1995
		FI 953263 A	30-06-1995
EP 0689368 A	27-12-1995	AT 153206 T	15-05-1997
		AU 691271 B	14-05-1998
		AU 2174595 A	04-01-1996
		BR 9508091 A	12-08-1997
		CA 2152215 A	21-12-1995
		WO 9535635 A	28-12-1995
		CN 1128476 A	07-08-1996



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/07075

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0689368 A		CZ 9603513 A	14-05-1997
		DE 59402759 D	19-06-1997
		DK 689368 T	08-12-1997
		ES 2103557 T	16-09-1997
		FI 965078 A	17-12-1996
		GR 3023908 T	30-09-1997
		HK 1003587 A	30-10-1998
		HU 76397 A	28-08-1997
		JP 8265843 A	11-10-1996
		NO 965315 A	18-02-1997
		NZ 287390 A	19-12-1997
		PL 317643 A	14-04-1997
		SG 34235 A	06-12-1996
		SI 9520064 A	30-04-1997
		SK 161396 A	05-11-1997
		ZA 9505091 A	10-04-1996
WO 9741654 A	06-11-1997	AU 2375097 A	19-11-1997
		EP 0864211 A	16-09-1998